



WHERE YOU NEED US

We have plant locations capable of supplying AGSORB® products throughout the United States. Our mineral deposits vary by location with each location's minerals offering unique characteristics. This translates into more product options and supply points for our customers.

LOOK HOW FAR WE'VE COME

Oil-Dri Corporation of America has been supplying agricultural carriers since 1966. We have a long history of working closely with our customers to develop specialized carrier solutions. As a result, our carrier technology has been a trusted part of our customer's formulations for over four decades. Our extensive reserves and technical support make us a valued partner in the industry. As technology changes, we are dedicated to working with the industry to develop the next generation of carriers.

WHY OUR CUSTOMERS CHOOSE AGSORB®

- High Liquid Holding Capacity
- Varied Process Options (RVM / LVM)
- Multiple Plant Locations
- Wide Range of Particle Sizes & Counts
- High Resistance to Attrition

AGSORB® IN ACTION

- Chemical Pesticides
- Biological & Biorational Pesticides
- Drying Agent
- Flowability Aid


OUR LAB IS YOUR LAB

Our technical service team is dedicated to delivering value to our customers. Our research and development facility located in Vernon Hills, Illinois is available as a resource for testing and product optimization as well as in-plant technical service consulting. We can conduct standard industry stability and MUP compatibility tests using customer formulations to ensure the best match with our products. We can also work with you to customize solutions that meet your specific needs.

MORE MINERALS MEAN MORE OPTIONS

While all of our minerals share some common traits, each of our locations process minerals with unique properties. We can work with you to determine the specific mineral that is best suited for your needs.

PLANT MAP & PRODUCT LOCATION

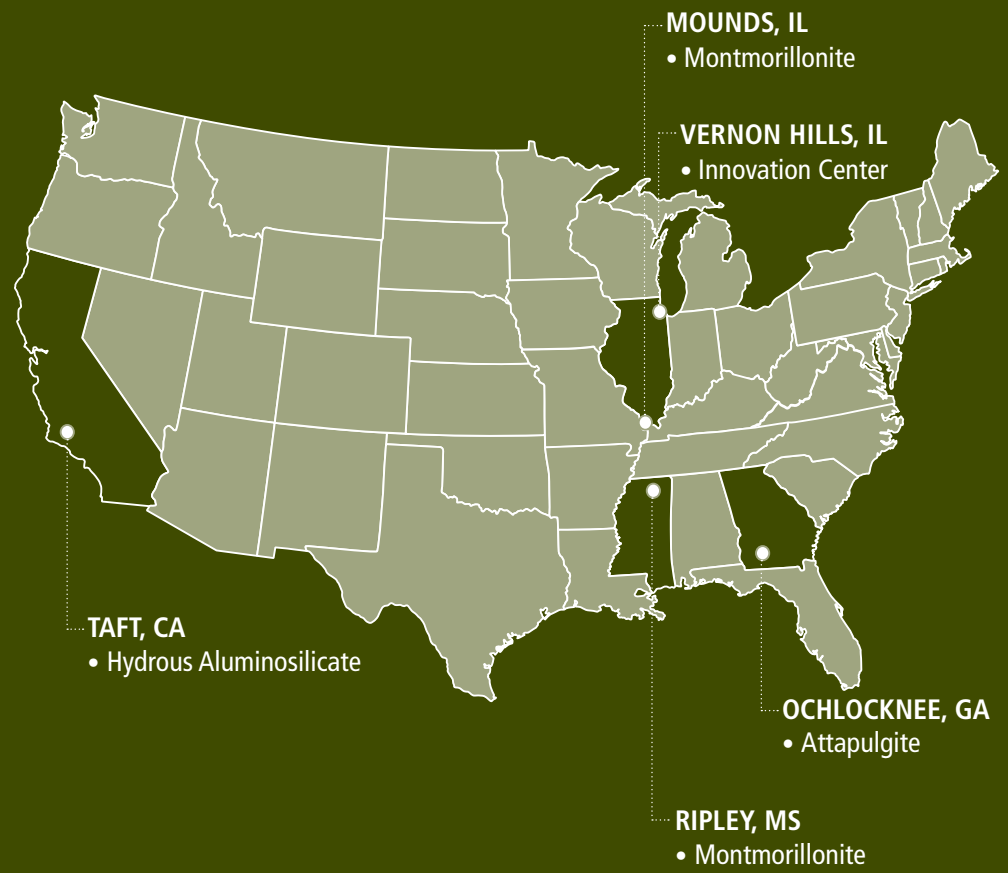

CONTACT

web www.agsorb.com
 phone 312.321.1515
 email aginfo@oldri.com

Oil-Dri Corporation of America
 410 North Michigan Avenue, Suite 400
 Chicago, Illinois 60611

HOW TO USE THIS REFERENCE GUIDE

This guide is an overview of the AGSORB® carrier product line. The product characteristics provided represent **TYPICAL** product values. Finished product characteristics may vary. Contact us if you require more detailed information on our products, or you do not see a product on this guide that suits your needs.

AGSORB®

PRODUCT REFERENCE TABLE

PRODUCTION LOCATION	MINERAL CLASSIFICATION	PRODUCT NAME	PROCESS OPTIONS	SIZE GUIDE NUMBER	UNIFORMITY INDEX	LIQUID HOLDING CAPACITY wt%	BULK DENSITY lbs/ft ³	PH	MOISTURE CONTENT wt%	PARTICLE COUNT MM/lb	ATTRITION % resistance	AVAILABLE COLORS
Ripley, Mississippi	Montmorillonite	30/60	RVM	40	50	31	37	5	7	10.0	75-85	Gray
		30/60	LVM	40	50	33	36	5	< 3	10.5	85-90	Gray or Red
		25/50	LVM	45	50	33	36	5	< 3	8.8	85-90	Red
		24/48	LVM	55	45	33	36	5	< 3	8.6	85-90	Gray or Red
		16/30	LVM	85	50	33	36	5	< 3	1.6	85-90	Gray
		12/24	LVM	110	60	33	35	5	< 3	0.8	85-90	Gray
		8/16	LVM	170	55	33	35	5	< 3	0.4	85-90	Gray or Red
		5/20	LVM	215	25	33	35	5	< 3	0.5	85-90	Gray or Red
Mounds, Illinois	Montmorillonite	8/16	LVM	170	55	30	38	5	< 3	0.4	85-90	Red
		5/20	LVM	215	35	30	38	5	< 3	0.3	85-90	Gray or Red
Taft, California	Hydrous Aluminosilicate	24/48	RVM	55	40	27	39	8	< 6	5.0	75-85	Tan
		16/30	RVM	85	50	27	38	8	< 5	1.2	75-85	Tan
		5/20	RVM	215	25	27	40	8	< 5	0.4	75-85	Tan
Ochlocknee, Georgia	Attapulgite	30/60	LVM	40	50	35	32	6	< 3	11.0	80-90	Light Gray
		24/48	RVM	55	40	32	33	7	10	8.8	75-85	Tan
		24/48	LVM	55	40	35	32	6	< 3	9.0	80-90	Light Gray
		16/48	LVM	65	35	35	31	6	< 2	4.0	80-90	Light Gray
		18/40	LVM	70	45	35	32	6	< 3	3.3	80-90	Light Gray
		16/30	RVM	85	50	32	33	7	12	1.8	75-85	Tan
		16/30	LVM	85	50	35	32	6	< 3	1.6	80-90	Light Gray
		12/24	RVM	110	60	32	33	6	10	0.8	75-85	Tan
		12/24	LVM	110	60	35	31	6	< 3	0.9	80-90	Light Gray
		8/16	LVM	170	55	35	31	6	< 3	0.4	80-90	Light Gray
		5/20	LVM	215	25	35	32	6	< 3	0.6	80-90	Light Gray
		TESTING METHOD				PS 006.01.01 GSA	PS 006.01.01 GSA	E1521-93 ASTM	E727-91 ASTM		D2216-80 ODC	E1520-93 ASTM